

**KK841F** 




**VSM ALUMINIUM OXIDE**




<b>Grain type</b>	Aluminium oxide
<b>Bonding</b>	Full-resin bonded
<b>Colour</b>	Red-brown
<b>Backing</b>	F-Cotton
<b>Flexibility</b>	Very flexible
<b>Production width</b>	1,480 mm (P60-P80) 1,050 mm (P100-P400)

**Materials**



**Features**



High-performance aluminium oxide abrasive for universal use. The additional grinding-active TOP SIZE layer reduces the temperature in the contact area and improves the cutting performance.


**Grit sizes:<sup>1)</sup>**



**Benefits**

- > Long service life
- > High performance abrasive
- > Very good adaptation to the workpiece
- > Cool cutting and extended service life due to the additional grinding-active layer VSM TOP SIZE

**VSM · Vereinigte Schmirgel- und Maschinen-Fabriken AG**  
Siegmundstraße 17 · 30165 Hannover · Germany  
T +49 511 3526 0 · F +49 511 3521 315  
sales@vsmabrasives.com · [www.vsmabrasives.com](http://www.vsmabrasives.com)

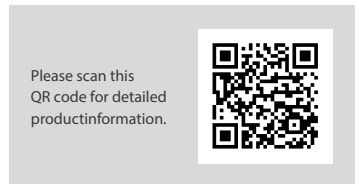

Please scan this QR code for detailed product information.

<sup>1)</sup> P = Categorized according to the FEPA standard. Subject to technical changes.